



EnduraHogs™ are the next generation **JEFFREY ® RADER** workhorse hogs. known for decades as the most reliable and durable machines for precise sizing of materials. Available in various configurations and sizes, customers also benefit from re-engineered housings that feature ultra-large access doors and other service-focused design enhancements for the easiest, safest and fastest maintenance.

> **EnduraHog™ Flextooth®** machines combine the compression crushing advantages of roll crushers with the high-capacity capabilities of impact crushers. Other benefits include...



Easy Access Technology

EnduraHog machines expand Jeffrey Rader's reputation for easy access to internal wear components with new housing upgrades and ultra-large doors that offer the safest, fastest, and easiest options for getting to hammers, rotors, and liners.

Maintenance operators can quickly perform routine maintenance with minimal downtime and lower risk of injury. No other machines on the market offer customers the Grinder's mix of performance. ease of use and low cost of ownership.





Hammer Design

Flextooth® hammers' patented cantilevered-movement design flexes hammers out of the crush zone to permit passage of uncrushables while ensuring optimal sizing. Our most innovative and increasingly popular Duratip® high-alloy hammers offer customers a replaceable tip design that maximizes shredding action and enables quick change-out during maintenance periods. Duratip products are part of our broader Duralife line of premium, wear-resistant OEM parts, all designed to complement our Brute Armor™ premium screen grates and break bars. Nobody offers a broader portfolio of long-wear, high performance OEM crushing parts.

OUR FLAGSHIP BRANDS









www.terrasource.com







Our disc-type rotor is assembled on a high-strength, alloy-steel shaft and is mounted in self-aligning spherical roller bearings in rugged steel housings. Rotor discs allow maximum flexibility of hammer arrangements.



Slant-Flow® Screen Grates


Slant-Flow® screen grates, unique to our EnduraHogs, are angled

into the flow of material being shredded. This patented design provides more shredding action and allows the material to evacuate faster. In addition, customers gain additional efficiency and cost-effectiveness due to less clogging and diminished fines, with less chance for overall operational failure.

New Brute Armor™ screen grates now available!

For operations demanding minimum maintenance and maximum tramp-metal resistance, we're proud to introduce Brute Armor™ premium screen grate materials with wear-resistant steel, the strongest and most durable product you can buy.

FLEXTOOTH® DIMENSIONS & WEIGHTS

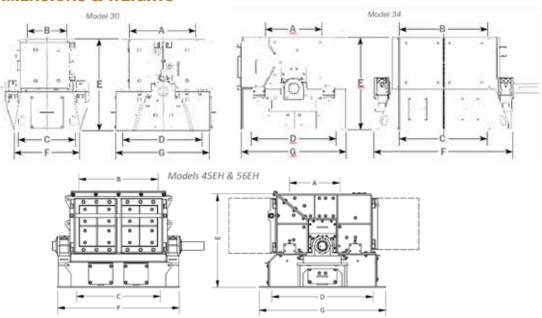

	Feed opening inches (mm)		Discharge opening inches (mm)		Overall height inches (mm)		Overall length inches (mm)	Shipping weight lbs (kg)
MODEL	Α	В	С	D	Ε	F	G	LBS
30FTE	21 (533)	21.25 (540)	22.5 (572)	35 (889)	36 (914)	40 (1016)	42.25 (1073)	3000 (1361)
34FTE	33.5 (851)	21.25 (540)	33.5 (572)	46 (851)	37 (940)	51 (1295)	53 (1346)	4500 (2041)
45FTEH	41.5 (1054)	25.5 (648)	43.5 (1105)	57 (1448)	55.5 (1410)	63 (1600)	64 (1626)	10300 (4672)
56FTEH	53.5 (1359)	33.5 (851)	56 (1422)	77 (1956)	63 (1600)	85.5 (2172)	82.5 (2096)	20200 (9163)

Certified drawings furnished for installation. Supervised installation available.

www.terrasource.com